

GRAFILIT® SL

GRAFILIT® SL is an expanded graphite based material with stainless steel foil insert, thus facilitating its handling and enhances the surface load. GRAFILIT® SL has excellent chemical and thermal resistance. Its high creep resistance and high compressibility make it suitable for highly demanding conditions in the chemical and petrochemical industries.



Composition	Expanded graphite, Stainless steel foil insert (AISI 316; 0.05 mm)
Color	Black
Approvals and compliances	BAM (oxygen)
Sheet dimensions	Sizes (mm):1000 x 1000 1500 x 1500 Thicknesses (mm):1 1.5 2 3 Rolls:/ Other sizes and thicknesses available on request
Tolerances	± 20 mm on length and width On thickness up to 1.0 mm ± 0.1 mm On thickness above 1.0 mm ± 10 %
Surface finish	

TECHNICAL DATA for 2 mm

Density	DIN 28090-2	g/cm3	1.3
Density (plain graphite)	DIN 28090-2	g/cm3	1.0
Total sulfur content	ASTM D5016	ppm	/
Leachable chloride content	FSA NMG 202	ppm	20
Leachable fluoride content	FSA NMG 202	ppm	20
Leachable halogen content			/
Ash content	DIN 51903	%	<1
Weight loss (air, 670°C, 4 h)	DIN 28090-2	%/h	/
Compressibility	ASTM F36A	%	42
Recovery	ASTM F36A	%	15
Tensile strength	ASTM F152	%	
Longitudinal		MPa	/
Transversal		MPa	/
Residual stress	DIN 52913		
50 MPa, 300°C, 16 h		MPa	49
Specific leak rate	DIN 3535-6	mg/(s·m)	0.05
Thickness increase	ASTM F146		
Oil IRM 903, 150°C, 5 h		%	/
ASTM Fuel B, 23°C, 5 h		%	/
Compression modulus	DIN 28090-2		
At room temperature: εKSW		%	/
At elevated temperature: εWSW/300°C		%	/
Creep relaxation	DIN 28090-2		
At room temperature: εKRW		%	38
At elevated temperature: εWRW/300°C		%	1.2
Operating conditions			
Minimum temperature		°C/°F	-200/-328


APPROPRIATE INDUSTRIES & APPLICATIONS

- CHEMICAL INDUSTRY
- COMPRESSORS & PUMPS
- GAS SUPPLY
- HEATING SYSTEMS
- HIGH-TEMPERATURE APP.
- PETROCHEMICAL INDUSTRY
- POTABLE WATER SUPPLY
- POWER PLANT
- REFRIGERATION & COOLING
- STEAM SUPPLY
- VALVES
- WATER SUPPLY

Maximum continuous temperature		
– under oxidizing atmosphere	°C/°F	550/1022
– under reducing or inert atmosphere	°C/°F	700/1292
Maximum pressure	bar/psi	100/1450

GRAFILIT® SL

PROPERTIES

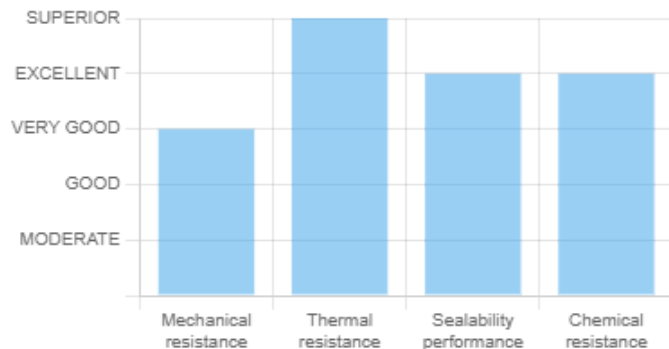


CHEMICAL RESISTANCE CHART

EN 13555




P-T DIAGRAMS EN 1514-1, Type IBC, PN 40, DIN 28091-2 / 3.8, 2 mm


Aggressive gasses

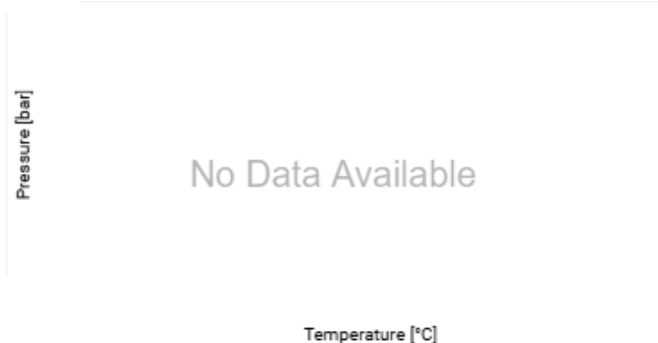

Steam or gasses

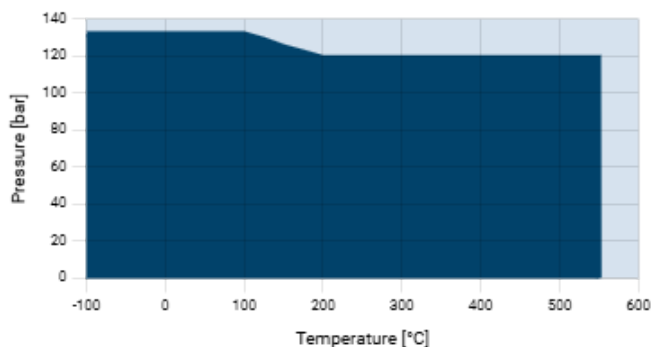

Liquids

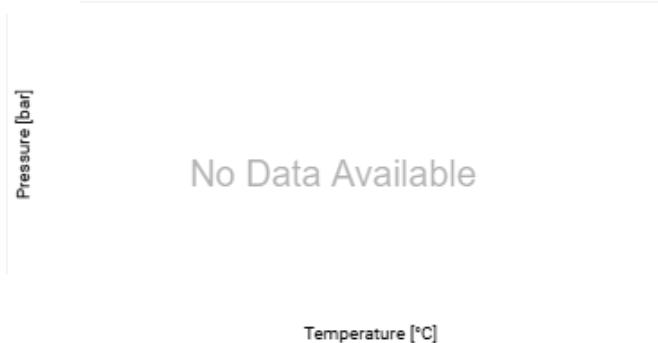


Legend:

- General suitability - Under common installation practices and chemical compatibility.
- Conditional suitability - Appropriate measures ensure maximum performance for joint design and gasket installation. Technical consultation is recommended.
- Limited suitability - Technical consultation is mandatory.

P-T diagrams indicate the maximum permissible combination of internal pressure and service temperature which can be simultaneously applied to a given gaskets thickness, size and tightness class. Given the wide variety of gasket applications and service conditions, these values should only be regarded as a guidance for the proper gasket assembly. In general, thinner gaskets exhibit better P-T properties.

SIGMA DIAGRAM DIN 28090-1

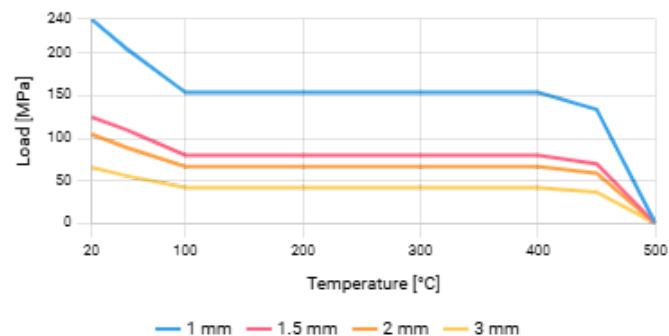

σ BO diagrams represent σ BO values for different gasket material thicknesses. These values indicate the maximum in-service compressive pressures which can be applied on the gasket area involved without destructing or damaging the gasket material.

All information and data quoted are based upon decades of experience in the production and operation of sealing elements. This data may not be used to support any warranty claims. With its publication this latest edition supersedes all previous issues and is subject to change without further notice.

Donit Tesnit d.o.o.
Cesta komandanta Staneta 38
1215 Medvode, Slovenia
Phone: +386 (0)1 582 33 00

Fax: +386 (0)1 582 32 06
+386 (0)1 582 32 08
Web: <https://donit.eu>
E-mail: info@donit.eu

For disclaimer please visit <https://donit.eu/disclaimer/>. Copyright © Donit Tesnit d.o.o.
All rights reserved Date of issue: Sep 12, 2025 / TDS-GSF-05-2018

